

Hose Reel

Model: FIS-07-B (25mm)


Model: FIS-08-A (19mm)

Manual & Swinging Type

Version 1.01
January 2025 release

Manual Hose Reel

Model: FIS-07-B (25mm)
Model: FIS-08-A (19mm)

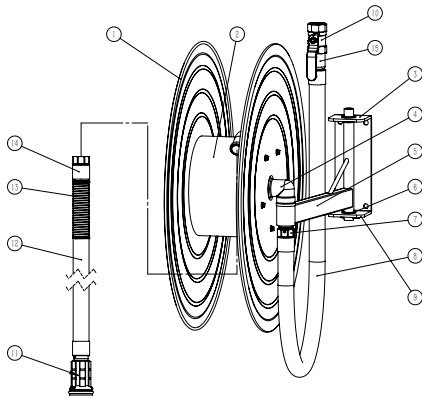

Parts Name

No	Description
1	Hose Reel Disc
2	Roller
3	Bracket
4	Manual Waterway
5	Swinging Arm
6	Locking Screw
7	Inlet Joint
8	Connection Hose
9	Holder
10	Valve
11	Nozzle
12	Fire Hose
13	Spring Jacket
14	Outlet Joint
15	Connector

Product Characteristics

No	Description
1	Full brass waterway which will never rot. We use nipples not hose clamps to fill in the interface between hose and waterway. Once screwed tightly, no leakage.
2	Hose reel with powder coated and anti-ultraviolet side discs. There can be pressure gauge at the reel axis.
3	High pressure resistance; working at 30kg pressure but not affected.
4	Endurance test on reel rotation; after over 3000 rotations, hose reels show no visible leakage. Our swinging hose reels are able to swing 1000 times to minimum 170° and show no visible leakage or damage.
5	High pressure spray. The nozzle can be adjusted to jet/spray.
6	Our hose reels can be also used for cleaning when used for fire fighting.
7	Fire hose with anti-aging and anti-ultraviolet function. Maximum WP is 12Bar. Average BP can be up to 45Bar.

Product Specification & Installation Measurement

Model	Hose Specification (mm)	Diameter (mm)	Bracket Length (mm)	Reel Width (mm)	Remarks
FIS-07-A	25mm x 25m / 30m	600 / 555	320	150 / 180	/
FIS-08-B	19mm x 25m / 30m	555	300	150	/

Usage

1	Open the valve ⑩, pull hose towards fire, open nozzle ⑪ to spray/jet and aim at base of fire.
2	After use, close the valve ⑩, drain water from hose, rewind the hose and close nozzle ⑪.



Gate 2, Aljada Logistics Area,
Behind Arada Project Management
Office, Near Airport Road,
Muweilah, 22436, Sharjah

rhinotek.ae