


Lock Shield Valve

Model: FIS - LS / FIS - HW

Version 1.01
July 2025 release

Lock Shield Valve

Model: FIS-LS/FIS-HW

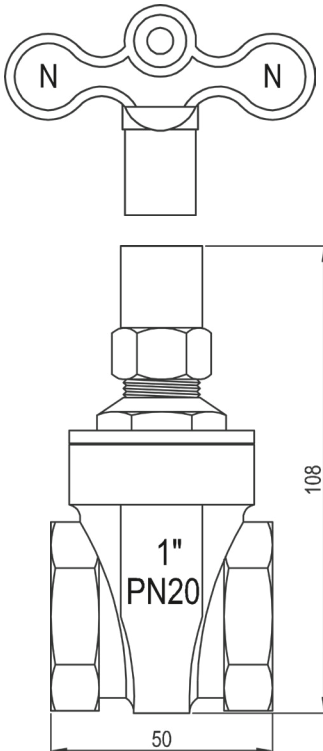

FIS MENA Lock Shield Valve is usually installed where unauthorized operation has to be avoided. A typical application of this valve is installing these at inlet pipe to the hose reel where it can be opened only by key and key kept by maintenance or fire safety department.

Features

- Solid Wedge, non-rising stem, screwed in bonnet.
- Valves are manufactured in accordance to BS 5154.
- Service temperature -10 to +66°C.
- Pressure rating is PN 20.
- End connection is BSPT threaded.
- Material: Brass

SPECIFICATION

Model No	Size	Pressure Rate	Description
FIS-LS	1"	PN20	Copper alloy gate valve with lockshield
FIS-HW	1"	PN20	Copper alloy gate valve with handwheel



Gate 2, Aljada Logistics Area,
Behind Arada Project Management
Office, Near Airport Road,
Muweilah, 22436, Sharjah

rhinotek.ae

