


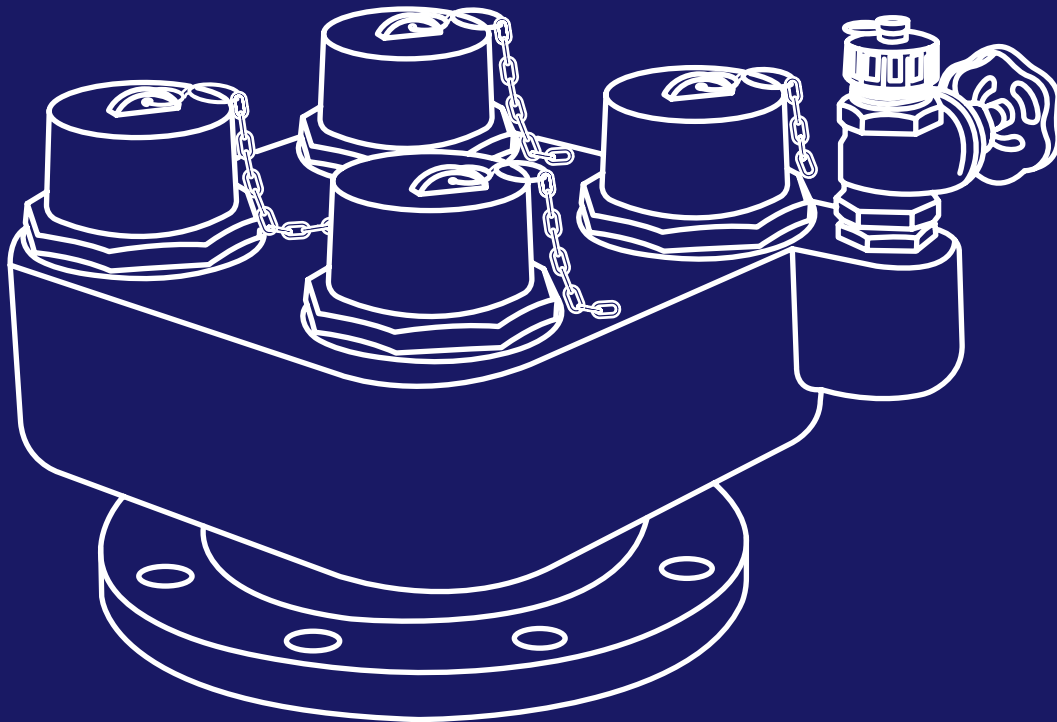

Breeching Inlet

**Model: FIS - BR2 / FIS - BR4 /
FIS - BR2A / FIS - BR4A**


Version 1.01
July 2025 release

Breeching Inlet

**Model: FIS-BR2/FIS-BR4/
FIS-BR2A/FIS-BR4A**



FIS MENA

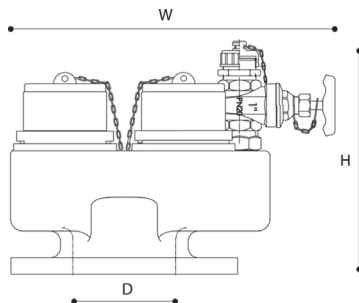

Specification

- Standard: BS 5041-3
- Outlet flange complying with BS 4504-2 16/21
- The flange to blank cap $\leq 260\text{mm}$
- DN25 drain valve complying with BS 5154
- Plastic blank cap with chain
- Vertical or horizontal mounting
- Non-return valves Test 1.7 bar
- Working pressure 10 bar
- Test pressure 20 bar
- Brass and bronze couplings upon requests

Model	Size	H (mm)	W (mm)	D (mm)	Connections	Coupling
FIS-BR2A	DN100	225	300	100	2 x BS336	Bronze
FIS-BR4A	DN150	255	340	150	4 x BS336	
FIS-BR2	DN100	225	300	100	2 x BS336	Brass
FIS-BR4	DN150	255	340	150	4 x BS336	



Gate 2, Aljada Logistics Area,
Behind Arada Project Management
Office, Near Airport Road,
Muweilah, 22436, Sharjah

rhinotek.ae

