


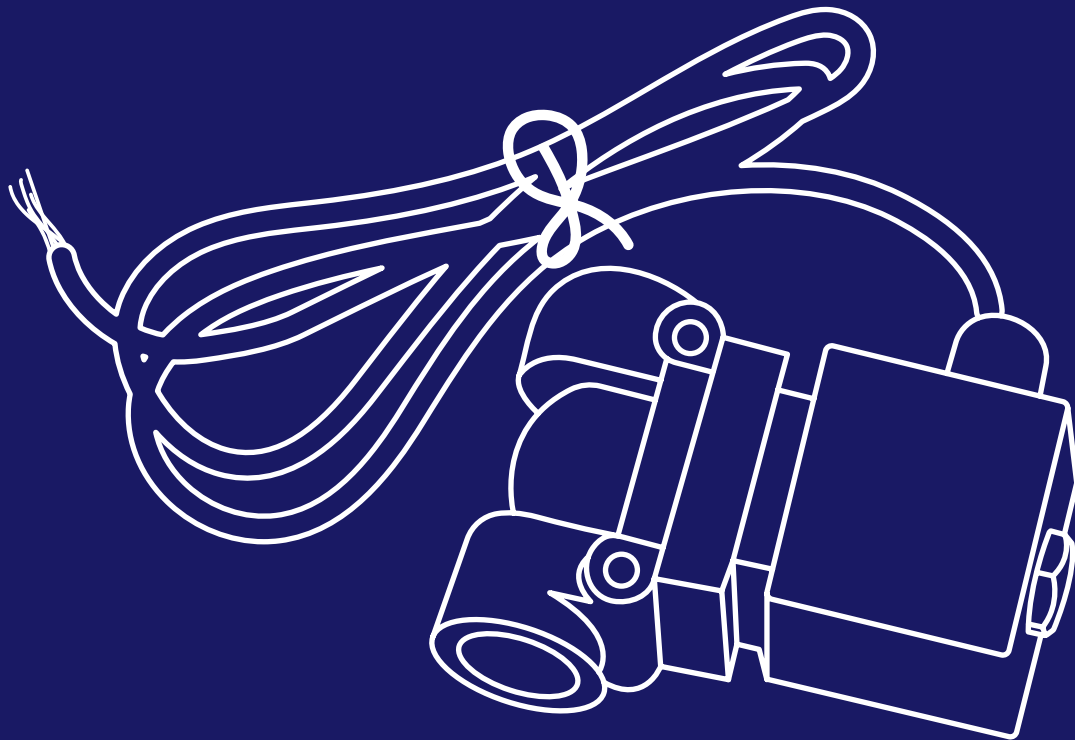


Solenoid Valve
Model: FIS - SV

Version 1.01
July 2025 release

Solenoid Valve

Model: FIS-SV

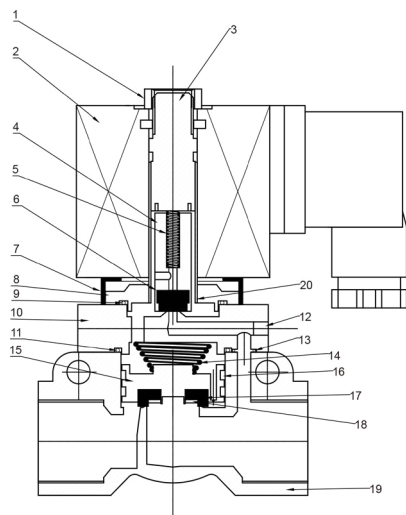

Technical Features

- Working Temperature Range: 0-85°C / 32-185°F
- Connection Sizes: 1/2" NPT
- Maximum Working Pressure: 350PSI
- Electrical Ratings: DC24V, 16W IP68
- Medium: Water and Air

Structure Character		
No	Name	Material
1	Nut	A3
2	Coil	
3	Static Iron Core	1J117
4	Dynamic Iron Core	1J117
5	Spring	304H
6	Chock Plug	EPDM
7	Plastic Housing	
8	Flange	ZCuAl8Mn13Fe3
9	O-ring (Ø25xØ1.5)	EPDM
10	Valve Body I	ZCuAl8Mn13Fe3
11	O-ring (Ø28xØ1.5)	EPDM
12	Casting Insert	ZCuAl8Mn13Fe3
13	O-ring (Ø6xØ1.2)	EPDM
14	Pagoda Spring	304H
15	Piston	ZCuAl8Mn13Fe3
16	Wearing Ring	
17	Hard Seang	PTFE
18	Flat Washer	SOS304
19	Valve Body Ii	ZCuAl8Mn13Fe3
20	Casing Pipe	S304



Gate 2, Aljada Logistics Area,
Behind Arada Project Management
Office, Near Airport Road,
Muweilah, 22436, Sharjah

rhinotek.ae

