


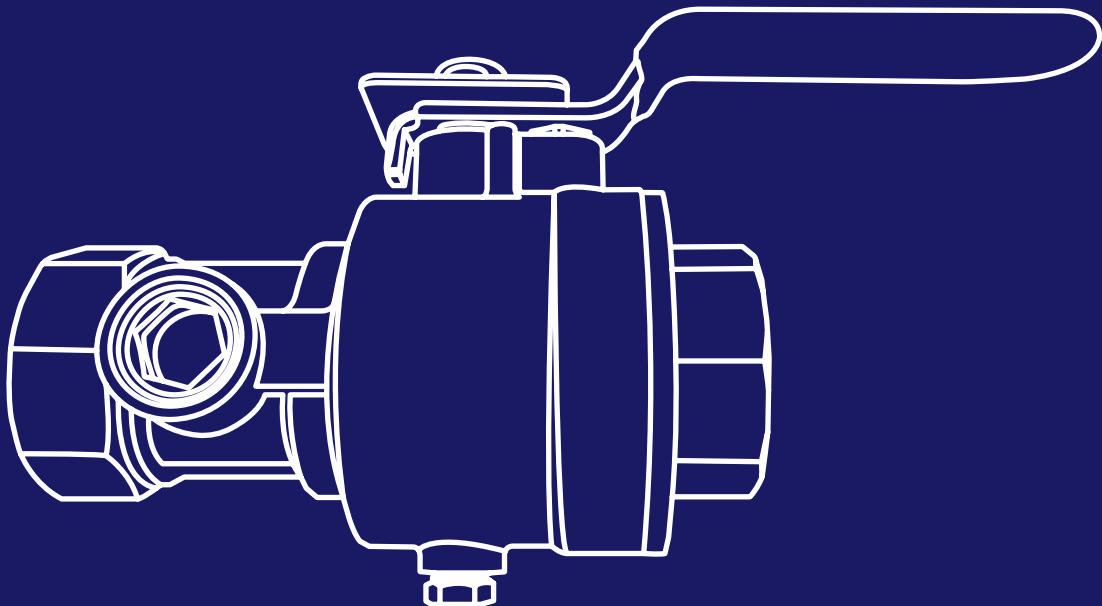


Test and Drain Valve

Model: FIS - TD

Version 1.01
July 2025 release

Test and Drain Valve Model: FIS-TD

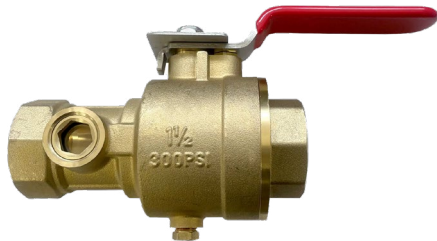

Key Features




- Working Pressure: 300 PSI
- Size: 1", 1-1/4", 1-1/2", 2"
- K-Factor: 5.6
- Certificated Size: Positive positioning of handle for OFF, TEST, or DRAIN.
- Large, integral sight glass on both sides.

Dimensions

A/B	Orifice	Port	C	D (ref.)	E	H
NPT 1"	1/2 (0.512)	1.024	5	2.76	5.16	1.65
NPT 1-1/4"	1/2 (0.528)	1.024	5	2.76	5.16	1.65
NPT 1-1/2"	1/2 (0.524)	1.575	6.57	3.5	6.34	2.28
NPT 2"	1/2 (0.524)	1.575	6.57	3.5	6.34	2.28

Materials

Item	Drawing No	Name	QTY	Material
1	Q2968-141-01 (FIS)	Body	1	C35330/C87800
2	Q2968-141-02	Cap	1	C35330/C87800
3	Q2938-100-03	PTFE	2	PTFE
4	413-44.5 x 26 x 8-K5.6	Ball	1	C35330/C87800
5	Q2968-100-05	Stem	1	C35330/C87800
6	0-10 x 1.8-NBR	O-Ring	2	NBR (A70±5)
7	Q2968-100-07 (FIS)	Handle	1	Q235A/304
8	LM-M10 x 10-Q235A	Nut	1	Q235A
	LM-M 10 x 10-304	Nut	1	304
9	Q2938-100-09	Gland Packing	1	PTFE
10	Q2938-100-10	Gland Ring	1	C37700
11	Q2968-100-11	Gland Nut	1	C37700
12	Q2958-100-18	Spring	1	302/304
13	GZ-Ø9.53	Steel Ball	1	304
14	Q2968-100-14 (FIS)	Indicator Plate	1	Q235A/304
15	Q2938-100-15	Plug	1	C35330/C87800
16	Q2928-100-11	Washer	2	NBR (A70±5)
17	Q2928-100-12	Sight Glass	2	LEXAN
18	Q2928-100-13	Retaining Ring	2	C37700

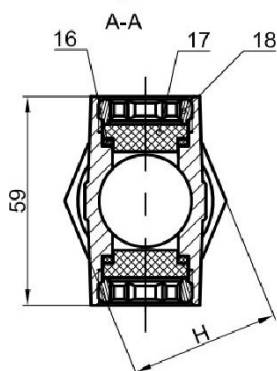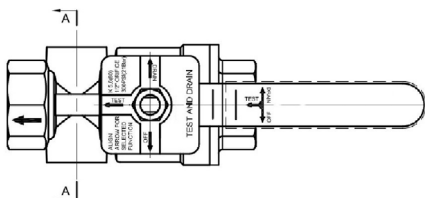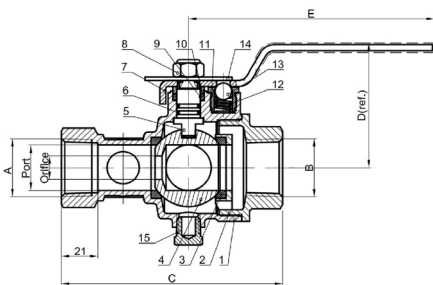



Gate 2, Aljada Logistics Area,
Behind Arada Project Management
Office, Near Airport Road,
Muweilah, 22436, Sharjah

rhinotek.ae

